

ZHSL-03-200

LED Street Light ZHSL-03

Installing Ways:
Both Horizontal and Vertical available and adjustable angle -15° to 15°

Material:
Die casting Aluminum body,
Ultra clear tempered glass and PC lens.



Back



Front



Side

Product Specification

Product Code	ZHSL-03-40	ZHSL-03-50	ZHSL-03-100	ZHSL-03-200
Input Wattage	30W	60W	120W	200W
Color Temperature	3000-6500K	3000-6500K	3000-6500K	3000-6500K
Luminous Flux	3300-3600 lm	6600-7200lm	13200-14400lm	22000-25000lm
Input Voltage	AC90-305V	AC90-305V	AC90-305V	AC90-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Power Factor	PF≥0.95	PF≥0.95	PF≥0.95	PF≥0.95
Color rendering index	Ra≥70	Ra≥70	Ra≥70	Ra≥70
Temperature of Working Condition	-40-50°C	-40-50°C	-40-50°C	-40-50°C
Humidity of Working Condition	20%-90%RH	20%-90%RH	20%-90%RH	20%-90%RH
LED Lifetime	50000h	50000h	50000h	50000h
Protection Grade	IP66	IP66	IP66	IP66
Installation Pipe Diameter	Φ50mm	Φ60mm	Φ60mm	Φ60mm
Installation Height	4-6m	4-8m	8-12m	10-14m
Net Weight	3.7kg	5.5kg	7.5kg	11.8kg
Gross Weight	4.0kg	6.0kg	8.0kg	12.5kg
Packing Size(mm)	570×240×255	680×295×150	750×355×165	915×415×185



ZHSL-03-200

90 degree installation

LED Street Light ZHSL-03


Product Description

This series is a high-performance street lighting available in four sizes. The luminaire is manufactured from high pressure die-casting aluminum. It shall have a led efficacy up to 120 lm/w and will be capable of producing up to 24000 luminaire lumens at 4000K finished in Grey or black as standard.


IP66 CE ROHS

Color:

- Double Grey
- Sandy Black
- Mat Silver



Photometric Data

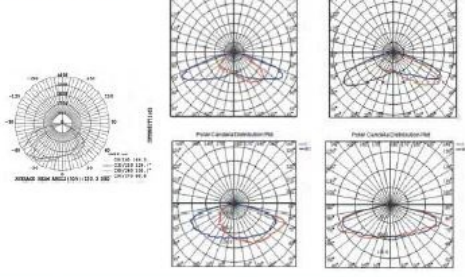

Product Size

Product Code	ZHSL-03-40	ZHSL-03-50	ZHSL-03-100	ZHSL-03-200
L (mm)	500	618	684	850
W (mm)	210	260	300	365
H (mm)	151	187	185	198