



ZHSL-15-150

LED Street Light ZHSL-15

Installing Ways:
Both Horizontal and Vertical available
and adjustable angle -5° to 15°

Material:
Die casting Aluminum body
Ultra clear tempered glass and PC lens



90 degree installation



Back



Front



Side

Product Specification

Product Code	ZHSL-15-40	ZHSL-15-80	ZHSL-15-150
Input Wattage	40W	80W	150W
Color Temperature	3000-6500K	3000-6500K	3000-6500K
Luminous Flux	4400-5000 lm	8800-10000 lm	15750-18750 lm
Input Voltage	AC90-305V	AC90-305V	AC90-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz
Power Factor	PF ≥ 0.95	PF ≥ 0.95	PF ≥ 0.95
color rendering index	Ra ≥ 70	Ra ≥ 70	Ra ≥ 70
Temperature of Working Condition	-40-50°C	-40-50°C	-40-50°C
Humidity of Working Condition	20%-90%RH	20%-90%RH	20%-90%RH
LED Lifetime	50000h	50000h	50000h
Protection Grade	IP66	IP66	IP66
Installation Pipe Diameter	Φ60mm	Φ60mm	Φ60mm
Installation Height	4-7m	6-10m	8-12m
Net Weight	3.5kg	5.0kg	8.5kg
Gross Weight	4.0kg	5.5kg </td <td>9.5kg</td>	9.5kg
Packing Size(mm)	610×240×130	710×330×130	850×380×240



ZHSL-15-40

ZHSL-15-150

LED Street Light ZHSL-15



Product Description

This series is a high-performance street lighting available in three sizes. The luminaire is manufactured from high pressure die-casting aluminum. It shall have a led efficiency up to 120 lm/w and will be capable of producing up to 18000 luminaire lumens at 4000K finished in Grey or black as standard.


IP66 CE ROHS

Color:

- Double Grey
- Sandy Black
- Matt Silver

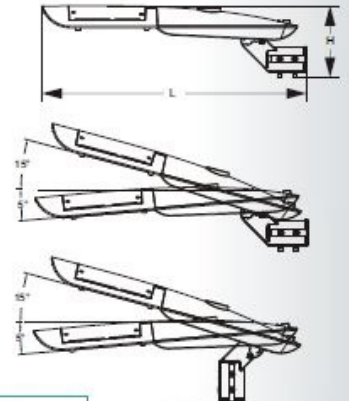

Photometric Data

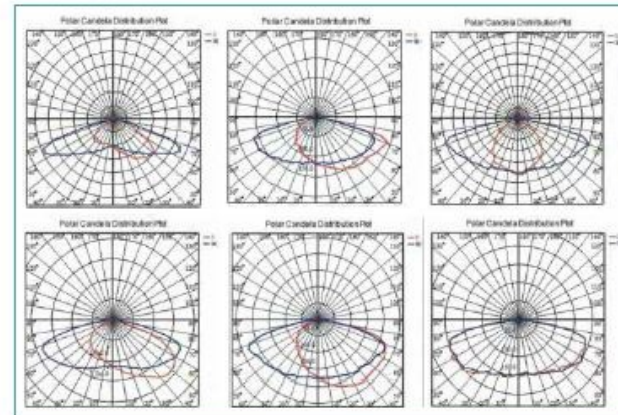

Product Size

Product Code	ZHSL-15-40	ZHSL-15-80	ZHSL-15-150
L (mm)	563	622	796
W (mm)	196	292	331
H (mm)	193	214	214

