



ZHSL-19-150

LED Street Light ZHSL-19

Installing Ways:
Both Horizontal and Vertical available
and adjustable angle -15° to 15°

Material:
Die casting Aluminum body
Ultra clear tempered glass and PC lens



90 degree installation



Front



Back



Side

Product Specification

Product Code	ZHSL-19-50	ZHSL-19-80	ZHSL-19-150
Input Wattage	50W	80W	150W
Color Temperature	3000-6500K	3000-6500K	3000-6500K
Luminous Flux	5500-6250 lm	9200-10400 lm	17250-19500 lm
Input Voltage	AC90-305V	AC90-305V	AC90-305V
Frequency Range	50/60Hz	50/60Hz	50/60Hz
Power Factor	PF≥0.95	PF≥0.95	PF≥0.95
Color rendering index	Ra≥70	Ra≥70	Ra≥70
Temperature of Working Condition	-40-50°C	-40-50°C	-40-50°C
Humidity of Working Condition	20%-90%RH	20%-90%RH	20%-90%RH
LED Lifetime	50000h	50000h	50000h
Protection Grade	IP66	IP66	IP66
Installation Pipe Diameter	Φ60mm	Φ60mm	Φ60mm
Installation Height	4-6m	6-10m	8-12m
Net Weight	3.7Kg	6.0Kg	7.4Kg
Gross Weight	4.2Kg	6.5Kg	8.0Kg
Packing Size(mm)	620×270×155	670×310×155	810×340×155



ZHSL-19-50

LED Street Light ZHSL-19



Product Description

This series is a high-performance street lighting available in three sizes. The luminaire is manufactured from high pressure die-casting aluminum. It shall have a led efficiency up to 120 lm/w and will be capable of producing up to 18000 luminaire lumens at 4000K finished in Grey or black as standard.


IP66 CE ROHS

Color:

- Double Grey
- Sandy Black
- Matt Silver



Photometric Data

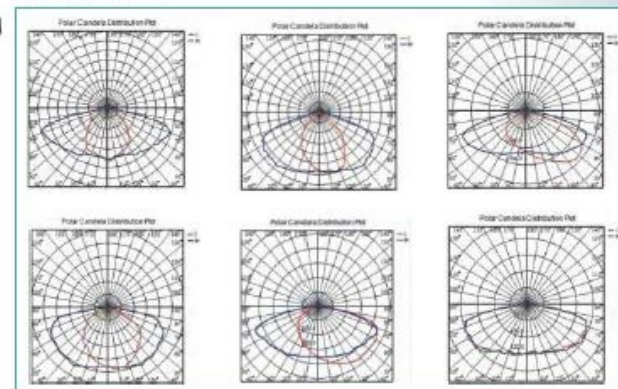

Product Size

Product Code	ZHSL-19-50	ZHSL-19-80	ZHSL-19-150
L (mm)	577	627	768
W (mm)	233	271	301
H (mm)	103	103	104